




## NTN Bearing Driveshaft do Brasil

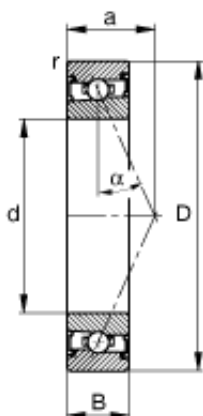

110 mm x 150 mm x 20 mm FAG HSS71922-E-T-P4S angular contact ball bearings

Bearing No. HSS71922-E-T-P4S

HSS71922-E-T-P4S Bearing 2D drawings and 3D CAD models

Size	110x150x20 mm
Bore Diameter	110 mm
Outer Diameter	150 mm
Width	20 mm
d	110 mm
D	150 mm
B	20 mm
a	40 mm
$D_a$	143 mm / Tolerance: H12
$d_a$	117 mm / Tolerance: h12
$r_{a \max}$	0,6 mm
$r_{\min}$	1,1 mm
	25 ° / Angle
m	1,02 kg / Weight
$C_r$	32000 N / Dynamic load rating (radial)
$C_{Or}$	27000 N / Static load rating (radial)
$n_{G \text{ Fett}}$	11000 1/min / Limiting speed for grease lubrication
Size	110x150x20 mm
Bore Diameter	110 mm
Outer Diameter	150 mm
Width	20 mm
d	110 mm
D	150 mm



## NTN Bearing Driveshaft do Brasil

B	20 mm
C	20 mm
Angle ( )	25 °
a	40 mm
r min.	1,1 mm
Da	143 mm
ra max.	0,6 mm
da	117 mm
Weight	0,932 Kg
Basic dynamic load rating (C)	32 500 kN
Basic static load rating (C0)	40 500 kN
(Grease) Lubrication Speed	9 000 r/min